


Alubar 3-27-1160 mm

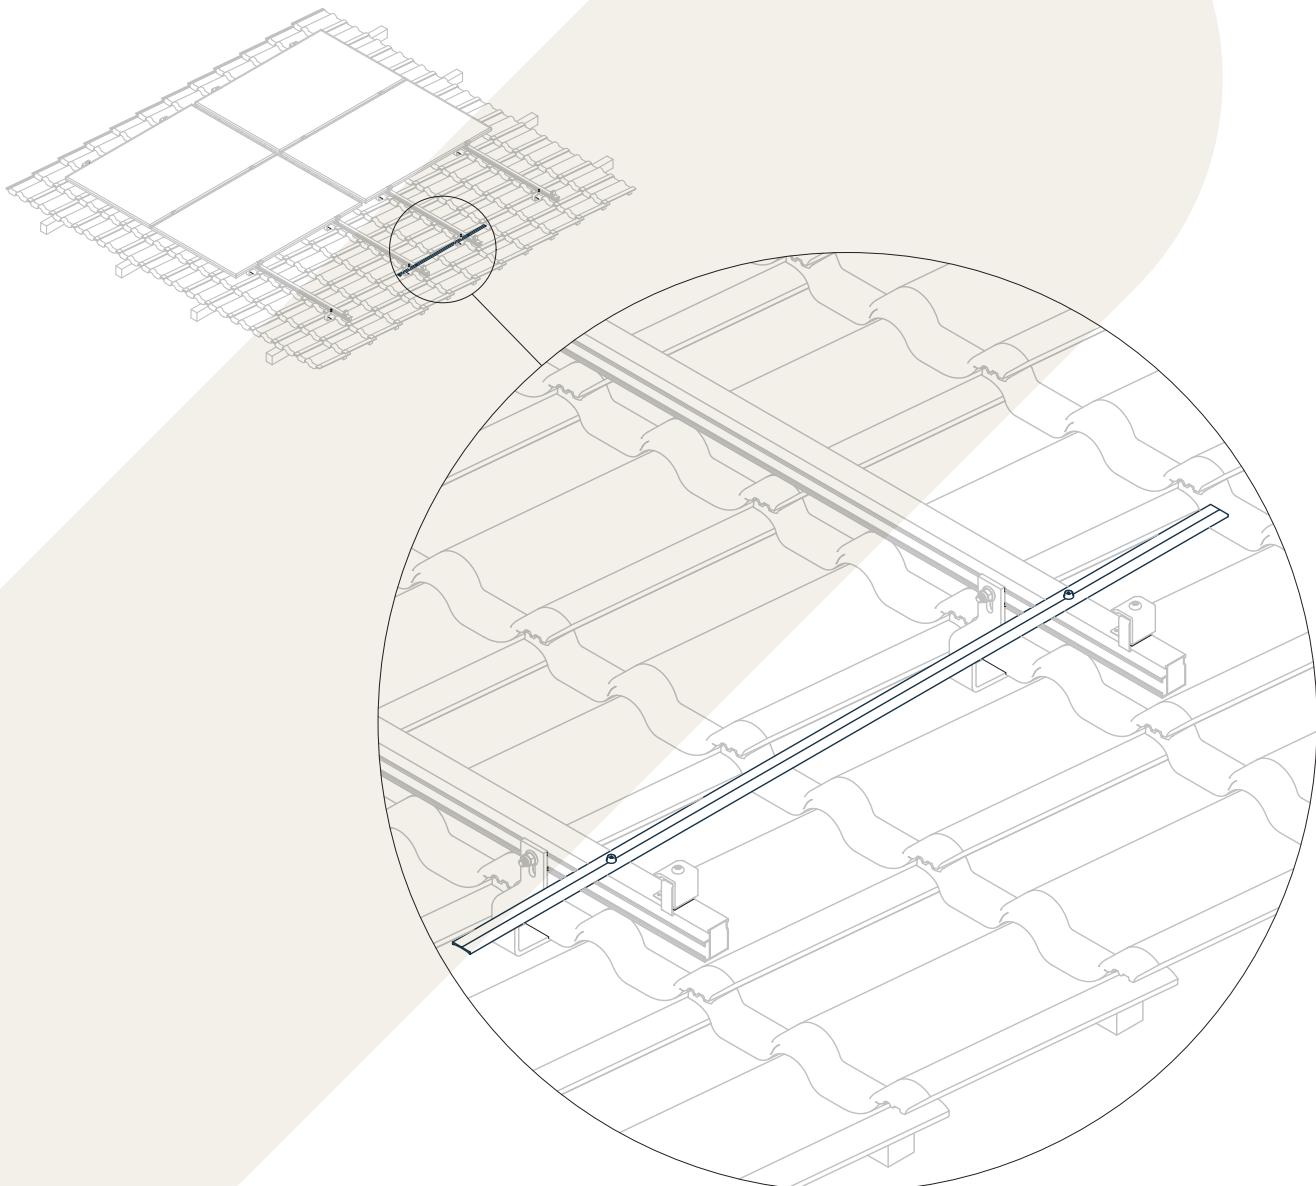


The mounting rails can be connected to each other with ground continuity in a single-layer setup using the sflex alubar 3-27-1160 mm. For landscape installation, the connection is made between the module columns; for portrait installation, between the module rows.

The sflex alubar 3-27-1160 mm can be mounted directly on the top side or on the upper hammer-head channel of the aluminum profile using a thin-sheet screw in each case, without pre-drilling.

because you can build on us

Supplementary sheet

Mounting on system carrier with hammer head channel / Mounting on system carrier without hammer head channel

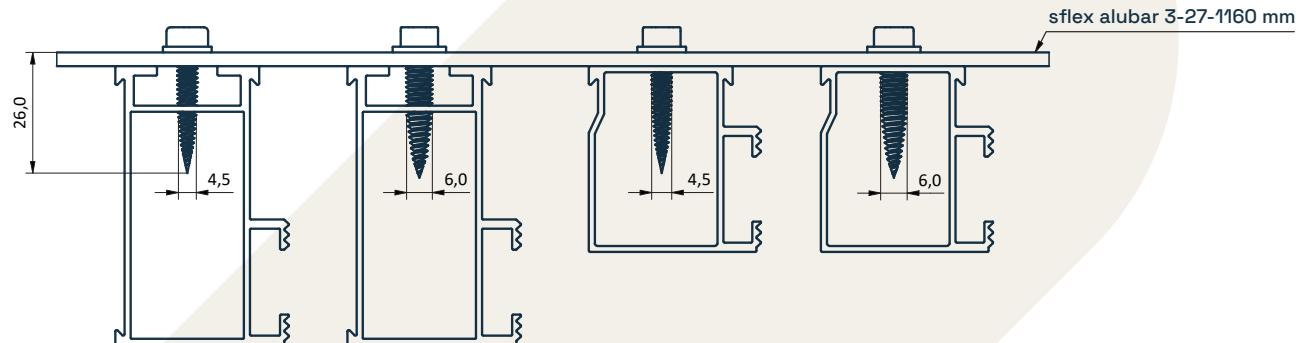

The requirements for surge protection of mounting systems for PV installations must be implemented in accordance with the applicable regulations.

This supplementary sheet complements the assembly instructions "Pitched Roof Installation AK" and is only complete and valid when used together with that document. Use without the associated main manual is not permitted.

To the product page for our sflex roof hooks and assembly instructions:



because you can build on us